

SQL Saturday 1130 Portland/Vancouver

November 15th, 2025

DON'T LET YOUR
PERMISSIONS BE
HIJACKED!



Don't Let Your Permissions Be Hijacked!

Erland Sommarskog
Data Platform MVP



ERLAND SOMMARSKOG

Independent consultant based in Stockholm

SQL Server MVP since 2001

esquel@sommarskog.se

<http://www.sommarskog.se>

Slides and scripts are available on
<http://www.sommarskog.se/present>

SQL Saturday 2025 Sponsors



WHAT THIS IS ABOUT

Permission Hijacking:

A person with less permissions than you have makes you unknowingly run code that (ab)uses your permissions to perform actions that are advantageous to the attacker.

PREAMBLE

ISN'T THIS TOO FANTASTIC?

- When it comes to security, nothing is “too unlikely”.
- If an attack can be performed, it will be attempted sooner or later, some place.
 - You don't want that place be your workplace.
- It all depends on the stakes.
 - Perform advantageous updates.
 - Steal data.
 - Install ransomware.
 - Just cause a mess (e.g., a disgruntled employee).

PREAMBLE

NOT ALL SITES ARE EQUAL

- In some places: only sysadmin and plain users and nothing in between.
 - Not very susceptible to the attacks I will discuss. (But see below.)
- Elsewhere: sysadmin, db_owner (application admin), db_ddladmin or similar (devs).
 - This is where you need to watch out!
- Don't overlook application logins.
 - They could have elevated permissions and SQL-injection holes.
- What about developers whose code gets deployed on the server?

THE EVIL DDL TRIGGER

[sysadmin.sql](#)

- When running index and statistics maintenance, an application admin could have installed a DDL trigger that performs malicious actions abusing sysadmin permissions.
 - Adding a user to sysadmin is just one example.
 - It could be data theft, data manipulation etc.
- Line of defence: PoLP, Principle of Least Privilege.
 - [Wikipedia](#). [Blog post from Andreas Wolter](#).
- In this case: `EXECUTE AS USER = 'dbo'`.
 - This way you sandbox yourself into the current database and renounce all your permissions on server level.

EXECUTE AS COMMANDS

- **EXECUTE AS USER:** run commands as a database user.
 - Sandboxed into the current database.
 - No server-level access or access to other databases.
 - Can still use temp tables.
- **EXECUTE AS LOGIN:** run commands as a server login.
 - Sandboxed inside the instance.
 - Can access any database and server-level objects.
 - No access to file system or linked servers set up with self-mapping.
- To impersonate a user/login you need **IMPERSONATE** permission on that user/login.

ABOUT REVERT

- Impersonation is in force until the REVERT command is executed *in the same scope*.
 - REVERT in an inner scope has no effect towards an EXECUTE AS in outer scope.
- REVERT must be executed from the same database as where EXECUTE AS was executed.
- Extraneous REVERT are ignored without error.
- Tip: Always put REVERT in its own batch, so that is executed also if there is an error.

A SMALL HICCUP

[sysadmin.sql](#)

- `EXECUTE AS USER = 'dbo'` may produce error 15517:
Cannot execute as the database principal because the principal "dbo" does not exist, this type of principal cannot be impersonated, or you do not have permission.
- Happens easily with databases restored from other servers.
 - Due to SID mismatch between sys.databases and the database itself.
- Routine: set database owner when you restore a database.
- My opinion: a database should be owned by an SQL login that exists solely to own that database.

RUNNING DATABASE MAINTENANCE

1. Ola Hallengren's Maintenance Solution.

- IndexOptimize accepts the parameter `@ExecuteAsUser`, which you set to `'dbo'` (or another user of your choice).


2. The maintenance plans in SSMS – no provision for EXECUTE AS USER.

- Only do backup and DBCC. Tell users to run index and stats maintenance themselves.
- Or for index and stats maintenance, have one task per database. Each task has its own login that is `db_owner` solely in that database. (Could be the database owner.)

DDL IN GENERAL

- For the server DBA any DDL on database level is dangerous, when there is a local db_owner or similar: creating indexes, users, granting permissions etc.
- Must bracket all DDL with `EXECUTE AS USER = 'dbo'` in that case.
- Corollary: cannot use UI in SSMS directly. Must use SQL commands.
- Or use the script button, see next slide.

SCRIPT BUTTON IN SSMS UI

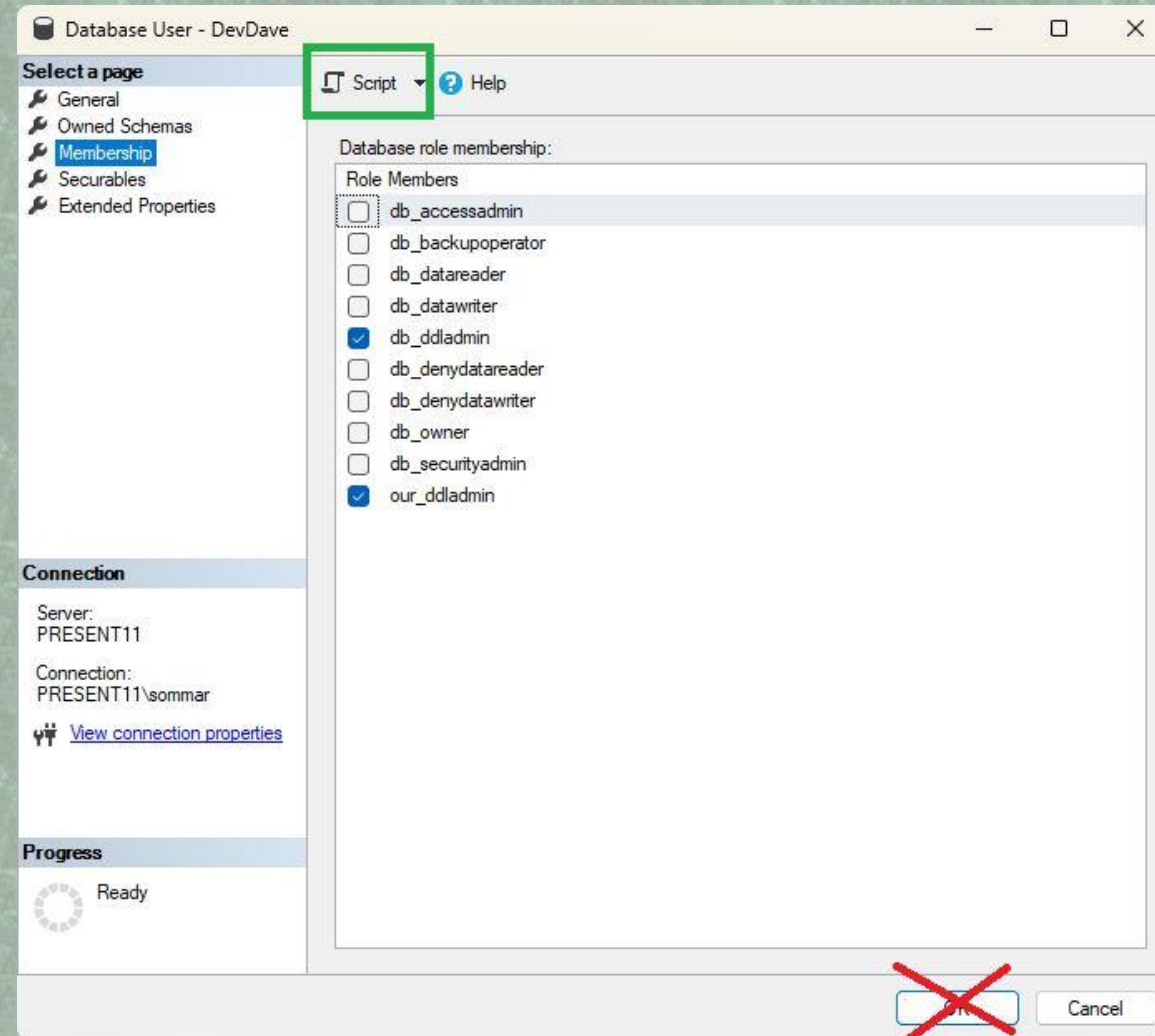

DEVS AND DDL TRIGGERS

[sysadmin.sql](#)

- A user in db_ddladmin could create a DDL trigger to hijack the permissions of a db_owner user.
- This role should not have rights to create DDL triggers!
- Take out all users from db_ddladmin.
- Create a new role, e.g. our_ddladmin (or ask for an AD group) that you add as a member to db_ddladmin.
- Add devs to this role.
- Deny our_ddladmin ALTER ANY DATABASE DDL TRIGGER.
- Why not DENY db_ddladmin directly? SQL Server doesn't let us.

DML TRIGGERS AND STORED PROCEDURES

- When you insert/update/delete data in tables, your permissions can be hijacked by a trigger.
- When running stored procedures, a developer may have hidden malicious code somewhere.
- If you only need to protect sysadmin (no one between db_owner and plain users) same as before: impersonate dbo.
- To get data from outside the database, read into temp tables before starting impersonation.

HOW TO PROTECT DB_OWNER?

- If there are users who can change stored procedures, triggers etc, they can hijack db_owner.
- Protection: PoLP, Principle of Least Privilege.
- Create a sandbox user with limited permissions and impersonate that user. For instance:

```
CREATE USER SandboxUser WITHOUT LOGIN
GRANT EXECUTE TO SandboxUser
GRANT SELECT, INSERT, UPDATE, DELETE TO SandboxUser
EXECUTE AS USER = 'SandboxUser'
```


PERMISSIONS FOR SANDBOX USER

- In many cases, a sandbox user with permission to run all stored procedures and full rights on all tables is enough.
- Specifically, it is sufficient with someone like DevDave who already has these permissions.
- But what if there is Bettie BusinessAnalyst who has her own schema where she can create tables, and you need to work with her tables?
- You may need a sandbox user with permission only to Bettie's schema.

ACCESS OUTSIDE THE DATABASE

- With EXECUTE AS USER you are sandboxed into the current database.
 - What about stored procedures with access to other databases?
 - What if you need to join to big tables in other databases? Getting data into temp tables beforehand may be impractical.
- You need to use a sandbox *login* that you impersonate with EXECUTE AS LOGIN.
- Easy to create if you are sysadmin.
- A db_owner needs to ask the server DBA to create one and get IMPERSONATE rights on that login.

NOTES ON SANDBOX LOGIN

- Would typically be an SQL login, as that is easier to create.
- You can impersonate an SQL login, even if SQL authentication is disabled.
- `ALTER LOGIN sandbox_login DISABLE` is a good idea.
- ...Unless you prefer to log in as the sandbox login in a separate window.
 - But then you need keep track of password and all that.

ACCESS TO LINKED SERVER?

- Your operation may include access to linked servers, directly or through stored procedures.
- If linked server set up with login-mapping, impersonating a sandbox login still works.
- If linked server has self-mapping, it gets complicated...
 - Set up login-mapping for the sandbox login only. (Remote server must be enabled for SQL authentication.)
 - Ask the AD admin to create a Windows user that you can use as a sandbox login. Start SSMS with RUNAS to log in as it.

BUT SELECTS SHOULD BE SAFE?

[sysadmin.sql](#)

- A table could have a computed column that calls a UDF.
- Or user has renamed table and replaced it with a view that calls a UDF that returns the data in the table.
- UDF could call xp_cmdshell to connect back as sysadmin.
- Best practice: Keep xp_cmdshell disabled, enable and re-disable when you need it.
- But there are other extended stored procedures...
- And there is also OPENQUERY & OPENROWSET (if enabled).
- So plain SELECTs also need EXECUTE AS USER.

A CHANGE OF THEME

- So far, we have discussed how hijacking attacks can be performed and how we can protect us.
- We will now make a break and discuss how we can reduce the need for giving out permissions that permit users to perform hijacking attacks.
- We will come back to more hijacking attacks later...

APPLICATION USERS

- Application may log in users with integrated security or application may use its own login/password.
- Ideally users and application logins should only have permission to run stored procedures.
- If application submits direct SQL statements, they also need SELECT, INSERT, UPDATE and DELETE permissions.
- But they should never have more permissions. **Never!**
 - Minimises the damage of any SQL-injection hole.

APPLICATIONS AND ELEVATED PERMISSIONS

- What if an application needs permissions beyond EXECUTE and read/write on tables?
 - Example: show a count of users connected to the database; requires server-level permission to use DMV.
- Rather than granting the permission to an application login, you can package the permission inside a stored procedure with full control over how the permission is used.
- You sign the procedure with a certificate, and from this certificate you create a user/login which you grant the required permission(s).

CERTIFICATE SIGNING: ARTICLE AND VIDEO

- On my web site, there is an in-depth article about this technique: *Packaging Permissions in Stored Procedures*, <https://www.sommarskog.se/grantperm.html>.
- Article includes stored procedure and script to automate the process.
- There is also a recording on [YouTube](#).

CERTIFICATE SIGNING KEY FACTS

- When you change a signed procedure, signature and permissions disappear.
- Thus, it must be signed again.
- Example: Debbie Owner wants a procedure that shows user count.
- Server DBA reviews it and approves it by signing and granting permissions.
- If Debbie changes the procedure, she needs new approval.
- Thus, server DBA is in full control.

CERTIFICATE SIGNING AND PERMISSION HIJACKING

- The packaged permissions apply inside dynamic SQL invoked by the signed procedure.
 - They also apply inside system procedures called by the SP.
- But they are removed when entering user-written modules: sub-procedures, triggers and functions.
- That is, the packaged permissions cannot be hijacked!
- But watch out for dynamic SQL! It could be constructed from data you have no control over.

AGENT JOBS

- DevDave approaches you and says: we need to run purges at night, can you create an Agent job to run this procedure?
- If you schedule it as sysadmin, Debbie and Dave can now make all sorts of changes to it.
- First line of defence: Hey, why don't you schedule it from Task Scheduler on the application server?
 - After all, Agent is for management tasks, not application jobs, isn't it?
- But you may not win that battle...

SOME AGENT PRINCIPLES

- Jobs owners should not be persons who can leave the company.
- Avoid adding users to msdb.
- From this follows that setting up an Agent job is always a sysadmin task.
- Application jobs in Agent should execute with same permissions as application users.
- If a job needs to perform actions that require higher permissions, use signed procedures.


ALTERNATIVE 2: SET USER ON JOB STEP

- Set user on the Advanced tab on the job step.
- Agent impersonates user with **EXECUTE AS USER**.
- Sandboxed into database, no cross-database access or linked servers.
- Job must be owned by sysadmin.
 - If not, setting is ignored.

The screenshot shows the 'Job Step Properties - Step1' dialog box. The 'Advanced' tab is selected. The 'Run as user' field is circled in black, showing the text 'AppLogin'. The 'Connection' section shows 'Server: PRESENT11' and 'Connection: PRESENT11\sommar'. The 'On success action' is 'Quit the job reporting success'. The 'Retry attempts' is set to 0. The 'On failure action' is 'Quit the job reporting failure'. The 'Transact-SQL script (T-SQL)' field is empty. The 'Output file' field is empty. The 'Append output to existing file' checkbox is unchecked. The 'Log to table' checkbox is unchecked. The 'Append output to existing entry in table' checkbox is unchecked. The 'Include step output in history' checkbox is unchecked.

ALTERNATIVE 3: SET JOB OWNER

- Set job owner on first page of job.
- SQL login or Windows login with “application permissions”.
- Agent impersonates the owner with EXECUTE AS LOGIN.
 - No restriction with cross-database or server access.
 - Linked servers with login-mapping work. Those with self-mapping *do not*.
- Side effect: job owner gets added as a user to msdb and as a member of SQLAgentUserRole on next install of a CU.

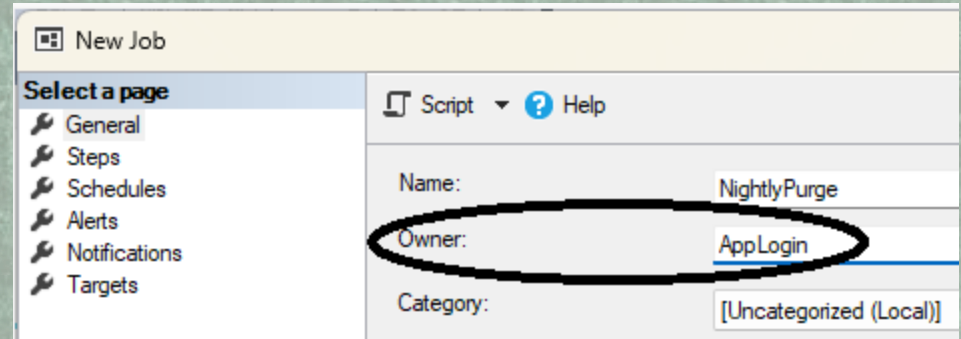

ALTERNATIVE 4: CMDEXEC JOB WITH PROXY

- More steps and involves more people.
- No impersonation, since Agent performs a real login in Windows.
- Thus, no restrictions with linked servers.
- While the most complicated, the most general.


ALTERNATIVE 4: CMDEXEC JOB WITH PROXY

- First request to get a AD account.
- Create login in SQL Server.
 - For linked server access, this may include more than one instance.
- Create database user and grant application permissions.
 - For instance, add it to the ApplicationUsers role.
- Create a credential for this account in SQL Server:

```
CREATE CREDENTIAL App1JobRunner  
  WITH IDENTITY = 'DOMAIN\App1JobRunner',  
  SECRET = 'TheWindowsPassword'
```

CMDEXEC JOB WITH PROXY

- Create a proxy in Agent with access to CmdExec.
- Use credential from previous step.
- Create job in Agent with sysadmin as owner.
- Create job step.
 - **Type:** CmdExec.
 - **RunAs:** The proxy.
 - **Command:** SQLCMD.

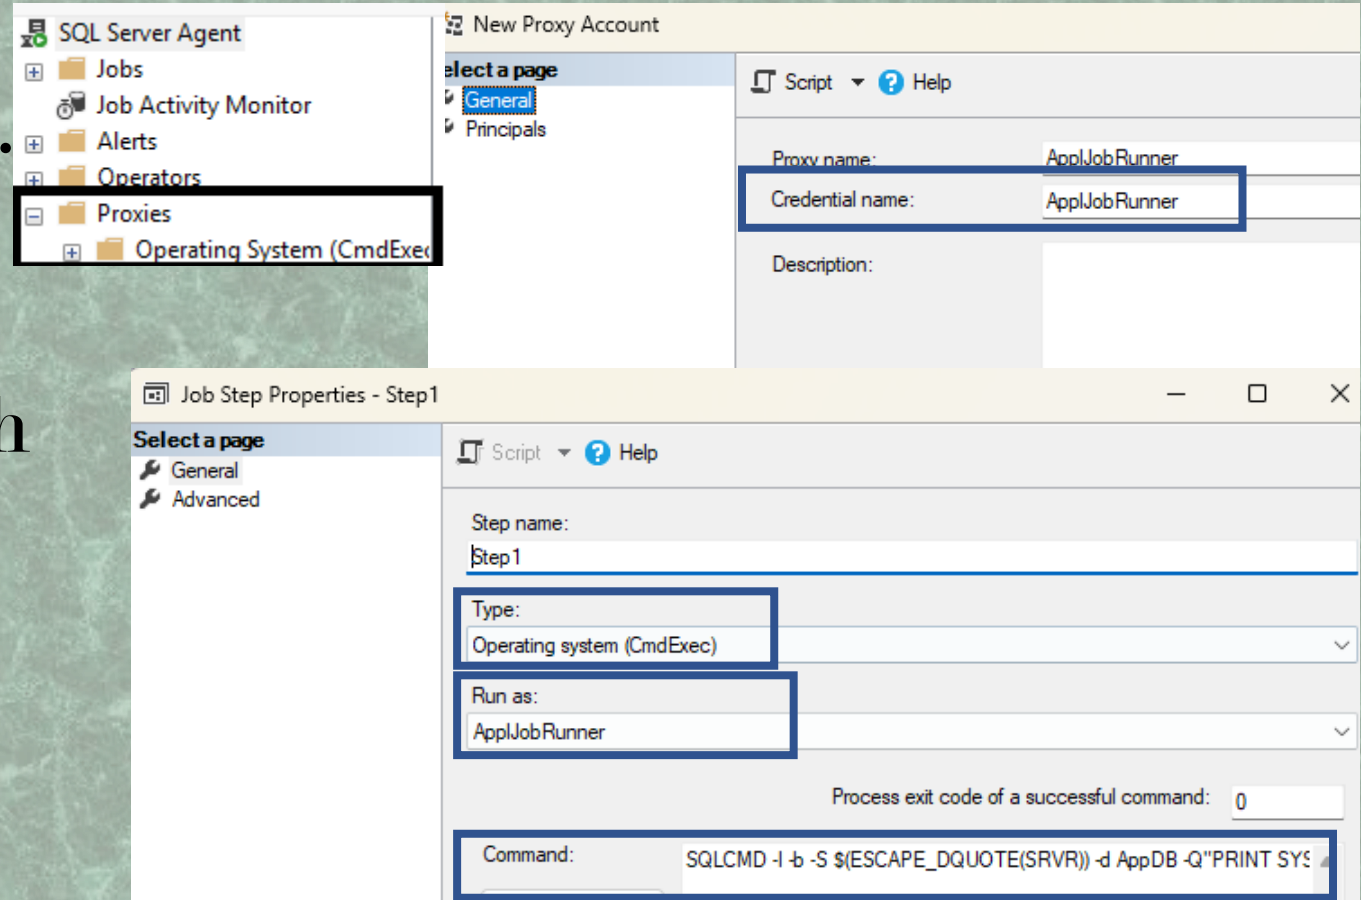

CMDEXEC JOB WITH PROXY RUNNING SQLCMD

```
SQLCMD -I -b -S $(ESCAPE_DQUOTE(SRVR))  
-d AppDB -Q"EXEC somesp"
```

- I – For SET QUOTED_IDENTIFIER ON.
- b – Propagate error code, so job can be reported as failed.
- S – Use Agent token for server name to make it easier to move job to another instance.
- d – The database to connect to.
- Q – Command to run.

NOTIFICATIONS TO DEVS

- Since developers and application admins are not in msdb, they don't have access to Agent history.
- Set up mail notifications, so they get mail if job fails. (On success as well, if they want.)
- On the Advanced page of the job step, you can define an output file. (Does not work when you set job owner.)
- Direct output file to a share where application team has access.

ATTACKS THROUGH DEPLOYMENT

- You get a deployment package from the application team.
- It could include all sorts of nasty things:
 - Adding extra logins/users with elevated permissions.
 - Manipulate data (in any database).
- Or what about this:
 - Set up a temporary linked server to system B with sensitive data and where you also are sysadmin.
 - They set up another linked server to a test system C they have access to and dump the sensitive data there.
- How do you defend yourself against hijacking?

DEFENCE AGAINST DEPLOYMENT ATTACKS

- For a plain script, one means of protection:
`EXECUTE AS USER = 'dbo' WITH NO REVERT`
- `WITH NO REVERT` causes any `REVERT` in the script to fail.
- Rather than `dbo`, use a sandbox user in our `_ddladmin`, or whatever permission you are prepared to grant the app team.
- Use a sandbox login, if actions are expected outside the database.
- First run in QA, this will reveal unexpected but legit actions.
 - But not necessarily malicious actions; they may check the permissions.

DEPLOYMENT ATTACKS, CONT'D

- Deployment script may have legit actions that requires high permissions.
- Or deployment is through DACPAC or MSI install, with no options to control login.
- Auditing may be your only choice here.
- There are several options, but SQL Server Audit is the only that audits that it has been turned off.
- DDL Triggers? They can be turned off with `DISABLE TRIGGER` – which does not fire DDL triggers...

ATTACKS THROUGH APPLICATIONS

- You are using the time-reporting system or some other local application.
- The developer of that application has a hook that recognises you and sets up a connection to an instance with sensitive data, abusing your permissions for malicious actions.
- Possible defence: One Windows user for normal company work, and a second login for DBA stuff, maybe through jump servers.
- Rigid network control of which machines can access each other.

SUMMARY: WHAT THIS HAS BEEN ABOUT

- Malicious users with some elevated permission can inject code that you unknowingly execute with your permissions, performing actions you don't agree to.
- Recall: Code can be DDL triggers, DML triggers, stored procedures and more.
- “Elevated permission” here includes access to the deployment pipeline!

SUMMARY: MEANS OF PROTECTION

- Principle of Least Privilege, PoLP.
- Impersonate dbo to get rid of your server-level permissions.
- To protect db_owner from being hijacked, use sandbox users or logins.
- Never put people directly in db_ddladmin, but create a role our_ddladmin that you deny the rights to DDL triggers.

SUMMARY: MEANS OF PROTECTION II

- Application users should have limited permissions, at most SELECT, INSERT, UPDATE and DELETE on tables.
- Application tasks in Agent jobs should run with application permissions, never elevated permissions.
- Use procedure signing when application users need to perform actions beyond their permission set.
- The application team may be in practice be equal to db_owner – even if they don't have access to the server.

FINAL WORDS

- Some of the attacks I have suggested may seem very contrived.
- Remember: if the stakes are high enough, a possible attack will be attempted, sooner or later at some place.
- Don't overlook the benevolent attacker.
 - That is, someone who performs an attack not out of malicious intent, but to circumvent corporate red tape to get their job done.
- You could have made those users sysadmin, but you decided to lock down their permissions. Certainly not a bad idea in itself.
- But if you don't watch out, they may find a way to “work around” that restriction.

Complete Session & Event Surveys

SQL Saturday Oregon/SW
Washington Session Survey



SQL Server Usage Survey



THAT'S ALL FOLKS!

Erland Sommarskog, esquel@sommarskog.se.

Slides and scripts at <https://www.sommarskog.se/present>.

Credits to **Baptiste Devigne** for pointing out the SELECT threat.


Don't Let Your Permissions be Hijacked:

<https://www.sommarskog.se/perm-hijack.html>.

Clean-up script:

[sysadmin.sql](#)

Session feedback →

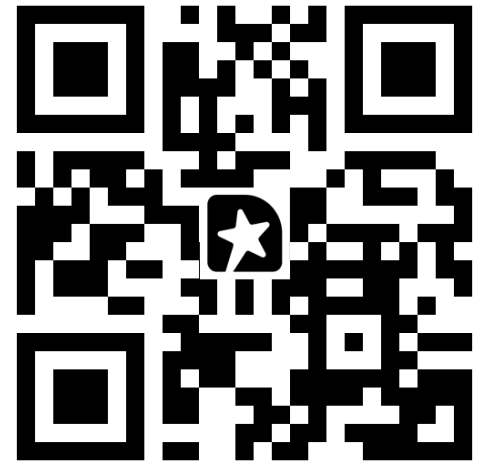

Don't Let Your Permissions Be Hijacked!